





HST

SpinTORQ Hydraulic Torque Wrench, 360° Continuous Rotating



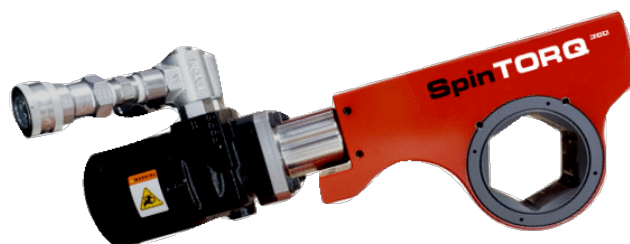

PRODUCT DETAILS

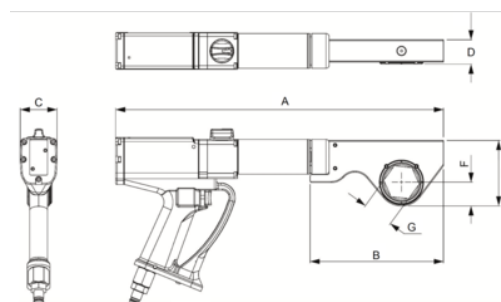- Low-profile head continuously rotates 360 degrees in forward and reverse, drastically reducing time spent tightening fasteners, while allowing the wrench to operate in very limited access bolting applications
- Fit and reaction points are designed to standard ANSI and API piping flange dimensions, so the tool rests against adjacent nuts during use
- Robust design combines a well-proven double enveloping worm gear drive to provide reliable and repeatable performance
- Durable powder coating is ideal for demanding work environments



PRODUCT ATTRIBUTES

Product	A	B	C	D	E	F	G		
HST686H113	3.28 in	8.00 in	15.35 in	1.31 in	3.86 in	1.40 in	1.83 in	140-686 lbf·ft	16.5 lb
HST953H200	3.28 in	9.06 in	16.41 in	1.65 in	4.89 in	1.85 in	2.03 in	190-953 lbf·ft	20 lb
HST1281H203	3.28 in	9.06 in	16.41 in	1.65 in	4.89 in	1.85 in	2.20 in	256-1281 lbf·ft	20 lb
HST1677H206	3.28 in	9.72 in	17.07 in	1.83 in	5.63 in	2.00 in	2.41 in	335-1677 lbf·ft	25.1 lb
HST2146H209	3.28 in	10.50 in	18.60 in	2.00 in	6.12 in	2.24 in	2.59 in	430-2146 lbf·ft	28.70 lb
HST2696H212	3.28 in	10.50 in	18.60 in	2.00 in	6.12 in	2.24 in	2.78 in	540-2696 lbf·ft	28.70 lb
HST3332H215	3.28 in	10.30 in	18.40 in	2.25 in	6.52 in	2.29 in	2.94 in	666-3332 lbf·ft	31.30 lb
HST4061H302	3.28 in	11.08 in	19.18 in	2.40 in	7.25 in	2.75 in	3.13 in	812-4061 lbf·ft	38 lb
HST5822H308	3.28 in	12.50 in	21.85 in	2.50 in	7.98 in	3.00 in	3.50 in	1164-5822 lbf·ft	41.7 lb
HST8030H314	3.28 in	12.50 in	21.85 in	2.50 in	7.98 in	3.00 in	3.92 in	1606-8030 lbf·ft	41.70 lb