



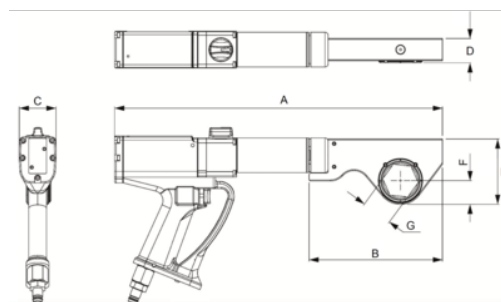
PST

Pneumatic Torque Wrench, 360° Continuous Rotating






PRODUCT DETAILS

- Low-profile head continuously rotates 360 degrees in forward and reverse, drastically reducing time spent torquing fasteners, while allowing the wrench to operate in very limited access bolting applications
- Dual-motor technology allows automatic two-speed operation for fast rundown speeds and precise final torque speeds
- Accuracy of applied torque is +/- 5%
- Wrench head can be indexed independently from the tool's gearbox, allowing the handle to be ergonomically positioned during operation
- Secondary safety trigger requires the operator's hands to be placed safely away from pinch points during operation
- Fit and reaction points are designed to standard ANSI and API piping flange dimensions, so the tool rests against adjacent nuts during use
- Robust design combines a well proven and highly efficient epicyclical gearbox with a double enveloping worm gear drive to provide reliable and repeatable performance
- Durable powder coating is ideal for demanding work environments



PRODUCT ATTRIBUTES

Product	A	B	C	D	E	F	G			
PST686H113	2.16 in	8.00 in	20.63 in	1.31 in	3.86 in	1.40 in	1.83 in	200-686 lbf·ft	1-13/16 in	16.5 lb
PST953H200	2.16 in	9.06 in	21.68 in	1.65 in	4.89 in	1.85 in	2.03 in	200-953 lbf·ft	2 in	20.0 lb
PST1281H203	2.16 in	9.06 in	21.68 in	1.65 in	4.89 in	1.85 in	2.03 in	256-1,281 lbf·ft	2-3/16 in	20.0 lb
PST1677H206	2.16 in	9.72 in	22.33 in	1.83 in	5.63 in	2.00 in	2.41 in	335-1,677 lbf·ft	2-3/8 in	25.1 lb
PST2146H209	2.16 in	10.50 in	23.11 in	2.00 in	6.12 in	2.24 in	2.59 in	430-2,146 lbf·ft	2-9/16 in	28.7 lb
PST2696H212	2.16 in	10.50 in	23.11 in	2.00 in	6.12 in	2.24 in	2.59 in	540-2,696 lbf·ft	2-3/4 in	28.7 lb
PST3332H215	2.16 in	10.30 in	23.28 in	2.25 in	6.52 in	2.29 in	2.94 in	666-3332 lbf·ft	2-15/16 in	31.3 lb
PST4061H302	2.16 in	11.08 in	24.02 in	2.40 in	7.25 in	2.75 in	3.13 in	812-4061 lbf·ft	3-1/8 in	38 lb