



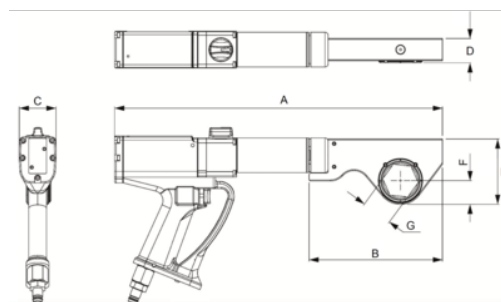
## PSTH

### Pneumatic Torque Wrench, 360° Continuous Rotating Heads






#### PRODUCT DETAILS

- Low-profile head continuously rotates 360 degrees in forward and reverse, drastically reducing time spent torquing fasteners, while allowing the wrench to operate in very limited access bolting applications
- Dual-motor technology allows automatic two-speed operation for fast rundown speeds and precise final torque speeds
- Accuracy of applied torque is +/- 5%
- Wrench head can be indexed independently from the tool's gearbox, allowing the handle to be ergonomically positioned during operation
- Fit and reaction points are designed to standard ANSI and API piping flange dimensions, so the tool rests against adjacent nuts during use
- Robust design combines a well proven and highly efficient epicyclical gearbox with a double enveloping worm gear drive to provide reliable and repeatable performance
- Durable powder coating is ideal for demanding work environments



## PRODUCT ATTRIBUTES

Product	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>			
<b>PSTH113</b>	2.16 in	8.00 in	20.63 in	1.31 in	3.86 in	1.40 in	1.83 in	140-686 lbf·ft	1-13/16 in	16.5 lb
<b>PSTH200</b>	2.16 in	9.06 in	21.68 in	1.65 in	4.89 in	1.85 in	2.03 in	190-953 lbf·ft	2 in	20 lb
<b>PSTH203</b>	2.16 in	9.06 in	21.68 in	1.65 in	4.89 in	1.85 in	2.20 in	256-1281 lbf·ft	2-3/16 in	20 lb
<b>PSTH206</b>	2.16 in	9.72 in	22.33 in	1.83 in	5.63 in	2.00 in	2.41 in	335-1677 lbf·ft	2-3/8 in	25.1 lb
<b>PSTH209</b>	2.16 in	10.50 in	23.11 in	2.00 in	6.12 in	2.24 in	2.59 in	430-2146 lbf·ft	2-9/16 in	28.7 lb
<b>PSTH212</b>	2.16 in	10.50 in	23.11 in	2.00 in	6.12 in	2.24 in	2.78 in	540-2696 lbf·ft	2-3/4 in	28.7 lb
<b>PSTH215</b>	2.16 in	10.30 in	23.28 in	2.25 in	6.52 in	2.29 in	2.94 in	666-3332 lbf·ft	2-15/16 in	31.3 lb
<b>PSTH302</b>	2.16 in	11.08 in	24.02 in	2.40 in	7.25 in	2.75 in	3.13 in	812-4061 lbf·ft	3-1/8 in	38 lb