

**TOOLS AND SOLUTIONS
FOR CRITICAL INDUSTRIES**



SpinTORQ CONTINUOUS ROTATION TORQUE WRENCH

**80% FASTER THAN HYDRAULIC
TORQUE WRENCHES**

IDEAL FOR

- Flange Bolting
- Heavy Duty Assembly
- Heavy Equipment Maintenance

Forward / Reverse Switch



**Secondary
Trigger**
*FOR ENHANCED
OPERATOR SAFETY*



**360° Continuous Head
Rotation**


Snap-on

SpinTORQ Pneumatic Continuous Rotation Torque Wrench



FEATURES

- Low-profile head continuously rotates 360 degrees in forward and reverse, drastically reducing time spent torquing fasteners, while allowing the wrench to operate in very limited access bolting applications
- Dual-motor technology allows automatic two-speed operation for fast rundown speeds and precise final torque speeds
- Accuracy of applied torque is +/- 5%
- Wrench head can be indexed independently from the tool's gearbox, allowing the handle to be ergonomically positioned during operation
- Secondary safety trigger requires the operator's hands to be placed safely away from pinch points during operation
- Fit and reaction points are designed to standard ANSI and API piping flange dimensions, so the tool rests against adjacent nuts during use
- Robust design combines a well proven and highly efficient epicyclical gearbox with a double enveloping worm gear drive to provide reliable and repeatable performance
- Durable powder coating is ideal for demanding work environments

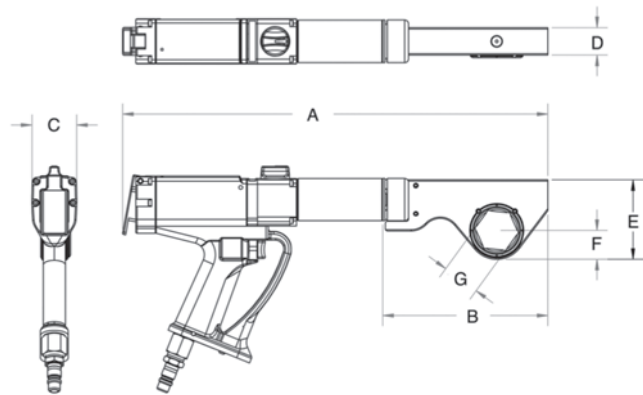

SPECIFICATIONS

Stock No.	Pneumatic Motor	Wrench Head	Hex Size inches (mm)	Torque Range ft. lbs. (Nm)	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	F inches (mm)	G inches (mm)	Weight Hex Head Only lbs. (kg)	Total Weight lbs. (kg)
PST686H113	PSTM116	PSTH113	1-13/16 (46)	140-686 (186-930)	20.63 (524)	8.0 (203)	2.16 (55)	1.31 (33)	3.86 (98)	1.40 (36)	1.83 (46)	6.5 (3.0)	16.5 (7.5)
PST953H200	PSTM116	PSTH200	2 (50)	190-953 (259-1,292)	21.68 (551)	9.06 (230)	2.16 (55)	1.65 (42)	4.89 (124)	1.85 (47)	2.03 (52)	10.0 (4.5)	20.0 (9.0)
PST1281H203	PSTM116	PSTH203	2-3/16 (55)	256-1,281 (348-1,737)	21.68 (551)	9.06 (230)	2.16 (55)	1.65 (42)	4.89 (124)	1.85 (47)	2.2 (56)	10.0 (4.5)	20.0 (9.0)
PST1677H206	PSTM116	PSTH206	2-3/8 (60)	335-1,677 (455-2,274)	22.33 (567)	9.72 (247)	2.16 (55)	1.83 (46)	5.63 (143)	2.0 (51)	2.41 (61)	15.1 (6.9)	25.1 (11.4)
PST2146H209	PSTM207	PSTH209	2-9/16 (65)	430-2,146 (582-2,910)	23.11 (587)	10.50 (267)	2.16 (55)	2.0 (51)	6.12 (155)	2.24 (57)	2.59 (66)	18.7 (8.5)	28.7 (13.0)
PST2696H212	PSTM207	PSTH212	2-3/4 (70)	540-2,696 (731-3,655)	23.11 (587)	10.50 (267)	2.16 (55)	2.0 (51)	6.12 (155)	2.24 (57)	2.78 (71)	18.7 (8.5)	28.7 (13.0)

Torque values are API Specification 6A / ISO 10423 maximum recommended for flange bolting.



FOR MORE INFORMATION contact your Snap-on Industrial Account Manager or call the Snap-on Industrial Customer Service Center at **1-877-740-1900**. To view our Industrial Website go to www.snapon.com/industrial.